

Please leave **the Engineering Conveyor** to **NKE!**


CSB30

- This small conveyor with head drive consists of 2 lines of the timing belt.
- You can change the position of driving motor where you want.
- Available to use as a non-slip belt conveyor with one belt.



CSSK50FAT

- You can set attachments directly on the belt depending on your purposes.
- It's possible to pitch-feeding with high accuracy by using Servomotor or Stepper motor. Please contact us to select the motor when you use by pitch-feeding.
- You can set attachments with exclusive nuts of this belt, 10mm pitch in the conveyance direction and 25mm in the width direction. (Select two types of nuts, brass or stainless)

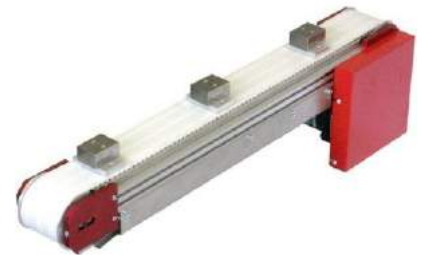


CSQ88

- This conveyor is equipped with clean table top chain made of plastic or stainless steel for transport table.
- It's suitable for carrying the metal works with burrs.
- This conveyor is hygienic, excellent in corrosion-resistant and keeping clean for a long time, because plastic chain (P) or stainless chain (S) is used for transport table chain.
- Plastic chain (P) can transport without damaging works and stainless chain (S) is suitable for carrying the metal works with burrs.




CSW62A

- This conveyor is with double speed roller chain.
- It's suitable for transporting wide works or containers as the accumulating conveyor.
- Conveyance speed is 2.5 times faster than normal chain speed.
- Appropriate for using a free flow line by fixing stoppers, and positioning apparatus on the conveyor frame.

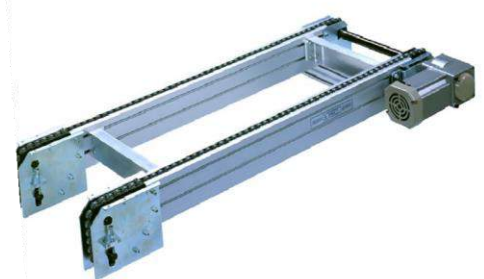

CSW103

- This big conveyor for an heavy objects is with No50 double speed roller chain.
- Can select from two types of roller chain on the conveyance plate, resin chain or steel chain.
- The conveyance weight per 1m is 160 kg for resin chain and 320kg for steel roller chain. Maximum conveyance weight is up to 690 kg (Depending on conveyance speed)
- The standard conveyor has Resin guide for transporting pallet.
- Safety cover and cross roller is utilized originally.

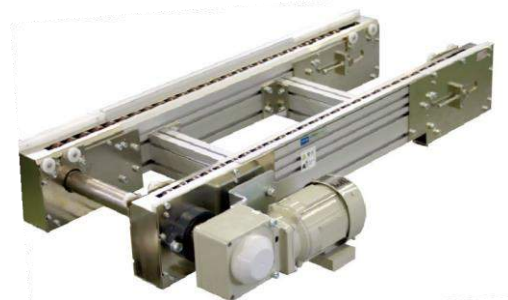

Can make your own **customized** conveyor by using NKE's engineering conveyor

Two Lines of timing belt conveyor with variable width

- Can transport works with different width by attaching variable width mechanism.
- This picture shows manual variable width mechanism by handles.
- Can also make auto Variable width mechanism with motor, inspite of handles.




Pitch-feeding conveyor with attachments

- Can set attachment with screws on the timing belt.
- It's possible to pitch-feeding with high accuracy by using Stepper motor.



Table top chain conveyor with multi-row

- It's suitable for transport the works with burrs or edges before processing by using stainless top chain.
- Customized multi-row conveyor for transporting various size of works.

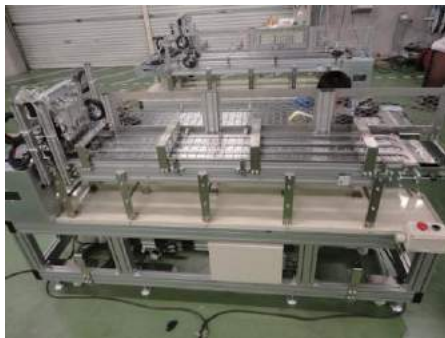

Tray changer

- This module can pile up the containers (pallet) with stacking and un-stacking units.
- Standard model has 3 types, Vertical type, U-Shape type and Straight Line type.




Double speed chain with increased safety

- This small conveyor is with No.30 double speed chain.
- For strengthen the safety measures, the cover is equipped with the cover not to be caught in.



Module with double speed chain

- This Module is with No.50 large double speed chain.
- This transport line is combined with module.

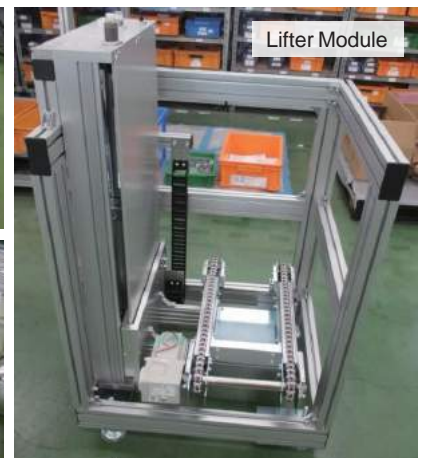

NKE Corporation

◆ **Vietnam Office**
AC Building, No.3 Lane 78 Duy Tan Street, Dich Vong Hau Ward
Cau Gay District, Ha Noi City
◆ **HP** : <https://www.nke.co.jp/>

◆ **E-mail**
nonomura.m@nke.co.jp

